


iDISPLAY™ Tablet 10.1" UIT410



The iDISPLAY Tablet 10.1" is designed as an interactive display for any location. Operating on an Android operating system and powered by Pulse technology, this slim and elegant display includes all of the solutions needed for commercial locations. Attach to any standard TV/monitor VESA bracket and simply turn on the power. It is a fully interactive commercial display that uses capacitive touch, built in WiFi and LAN, and a host of integrated features that work in either landscape or portrait format. With the option to expand to 3G services*, this is an amazing, interactive digital display that creates an engaging, memorable consumer experience.

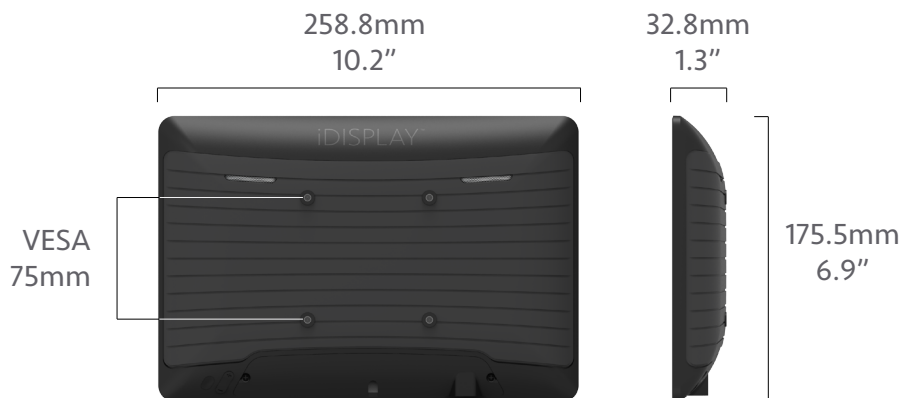

*3G optional, pending carrier compatibility/availability.
For more information about iDISPLAY™ Tablets
please visit our website: www.outform.com/iDisplay-Tablets

OUTFORM™

Panel Information	Screen Size	10.1"
	Resolution	1280 x 800 Pixels
	Brightness	300 cd/m ²
	Contrast Ratio	900
	Aspect Ratio	16:9
	Active Area Size (WxH)	216.96 x 135.6mm
	Viewing Angle Touch	80°/80°(H), 80°/80°(V)
	Touch Technology	Capacitive G+G 10 point
Hardware and OS	CPU	RK3188, Cortex-A9, up to 1.6GHz Quad Core
	GPU	Mali 400 MP4, 600MHz
	Internal Memory	1GB, DDR3
	Flash Memory	8GB
	Operating System	Android 4.4 / 5.1
	Battery	Li 3300/3=9900mAh(Optional)
Video/Images	Video Formats	3GP, MP4, AVI, MKV, FLV, MOV, RM, RMVB
	Video Codecs	MPG-1, MPG-2, MPG-4, H.263, H.264, VC-1, RV, VP6/VP8, MVC
	Image Formats	JPG/JPEG, PNG, BMP
	HDMI Output	Mini HDMI
	Playback Software	Built-in software allows for easy setup of a playlist of videos and/or stills which can be looped infinitely without any additional software. Alternatively, any installed app can be auto-started upon boot-up.
Audio	Speakers	1W x 2
	Audio Codecs	MP3, WMA, AAC, FLAC, WAV
Communications	Bluetooth	4.0
	Wi-Fi	802.11 b/g/n 2.4GHz
	Wired Ethernet	10M/100M, RJ45
	Wireless 3G	Through internal Mini-PCIE Card (Optional)
General information	Color	Black
	Camera	No Camera
	I/O ports	USB 2.0 Host x 3, RJ45, Micro USB 2.0 OTG x 1, 3.5mm Audio Jack, Mini HDMI, DC
	Included in Box	Display Unit, Power Adapter, Power Cable, User Manual, Warranty
	Optional Accessories	Floor stand, counter stand (L), shelf clip, adjustable shelf clip, wall bracket, rotating bracket
	Sensors	G-Sensor (3-Axis accelerometer)
	Power Input	12V/2A
	Power Consumption	14W (max)
	Power Over Ethernet	Through RJ45
	Operating Temperature	0-40 °C
	Relative Humidity	85%
	Certifications	Display Unit: ROHS, FCC and CE complaint Power Supply Unit: UL, FCC and CE compliant Battery: UL, UN38.3
Dimensions	Size (L x W x H)	258.77 x 32.8 x 175.47mm
	Product Weight	0.78kg
	Gift Box Size	400 x 225 x 69.5mm
	Master Carton Size	420 x 230 x 250mm
	Master Carton Weight	4.33kg
	Units per Master Carton	3pcs