

NEXNOVO


for next innovation

XRW Series

Front



Back

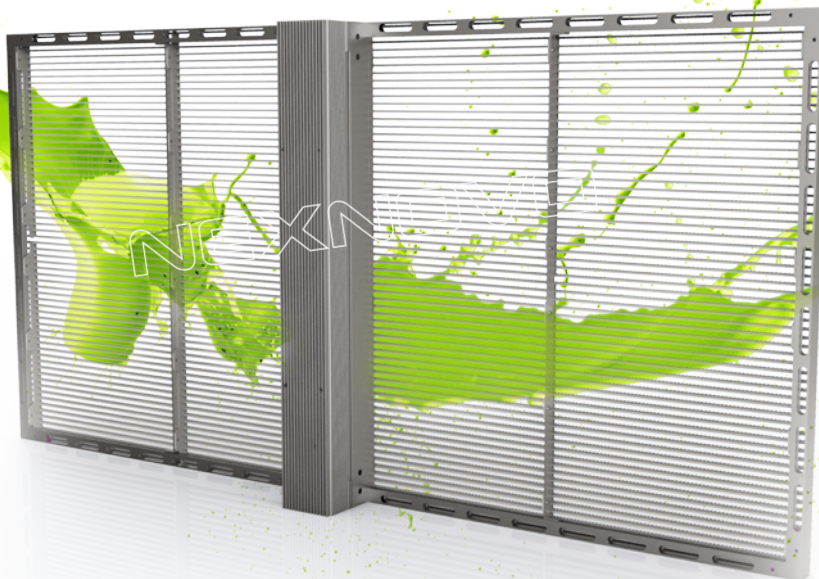

Features & Advantages



High transparency



Modular design



Easy installation and debug



Easy transportation with light weight



High brightness



Easy maintenance and update




Noise-free power supply




Stable performance


Quick and Easy Installation Design

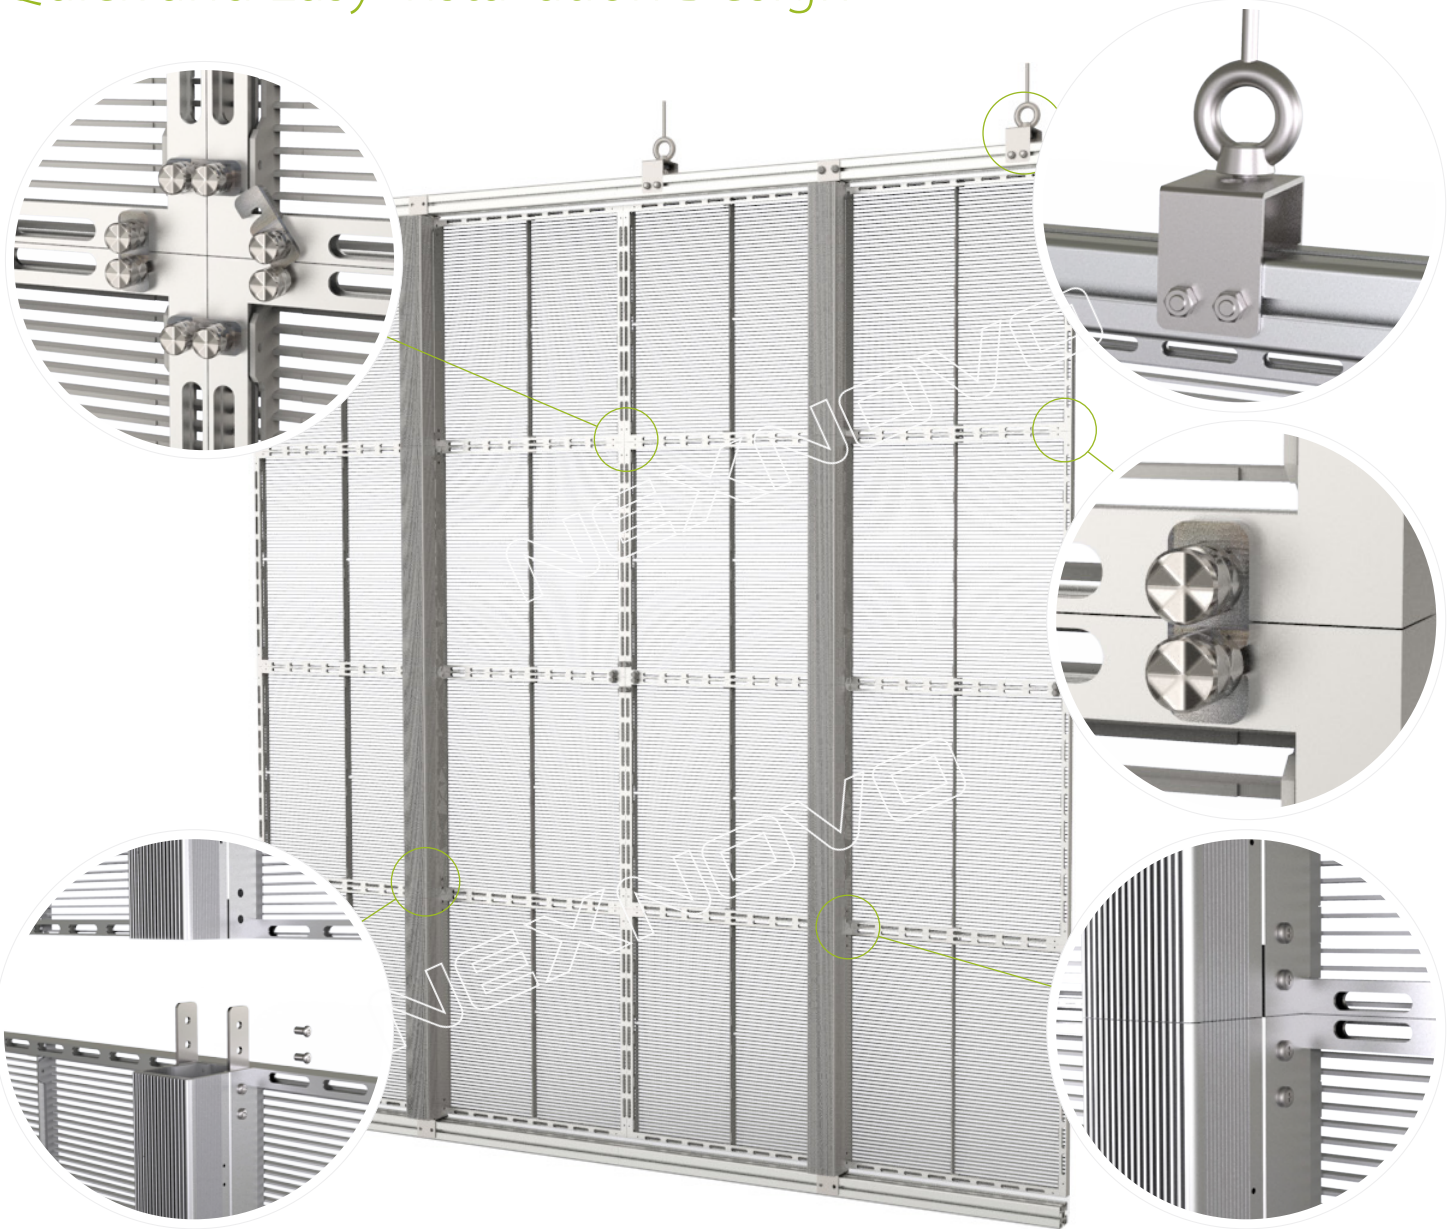


Sizes

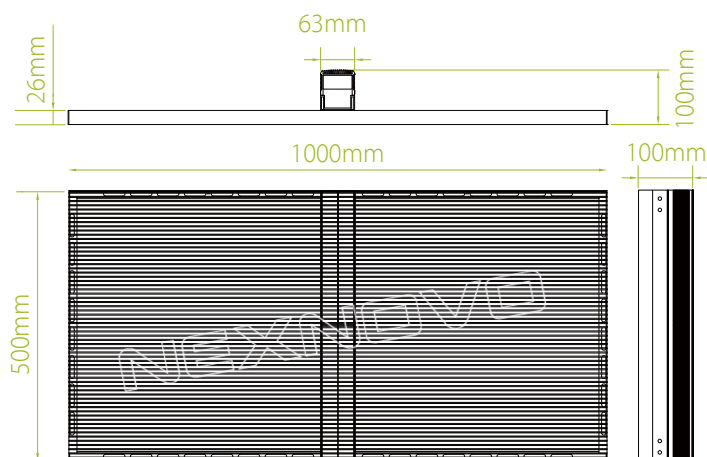

XRW3

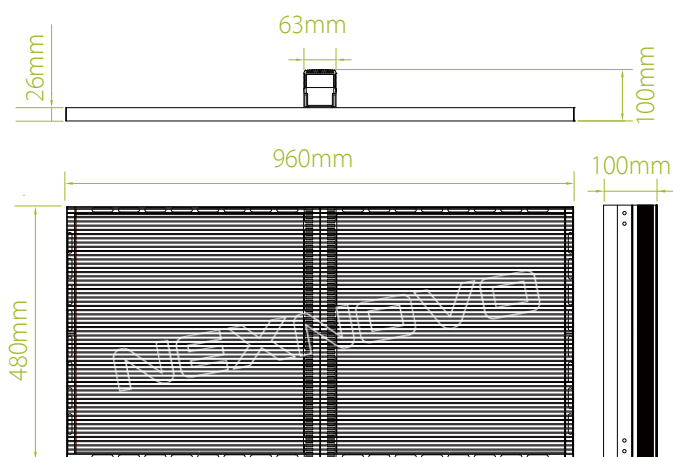

XRW5/XRW8/XRW10

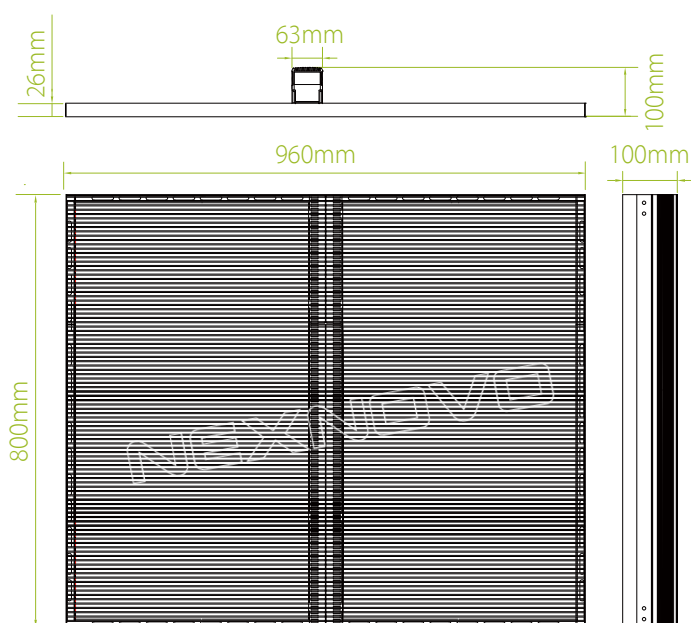

XRW8/XRW10

Specifications

Type	XRW3	XRW5	XRW8	XRW10
Pixel Pitch(mm)	3.9×7.8	5×8	7.5×8	10×10
LED Model	SMD 1921	SMD 1921	SMD 1921	SMD 1921
Brightness(cd/m²)	5500~6000	5500~6000	5500~6000	5500~6000
Transparency	>75%	>75%	>75%	>80%
Display Size(mm)	1000×500	960×480	960×480 960×800	960×480 960×800
Display Resolution	256×64	195×60	128×60 128×100	96×48 96×80
Resolution(dot/m²)	32873	25000	16666	10000
Max.Power(w/m²)	800	860	868	868
Avg.Power(w/m²)	240	258	280	280
Ingress Protection	IP20	IP20	IP20	IP20
Refresh Rate(HZ)	≥ 1920	≥ 1920	≥ 1920	≥ 1920
Weight(kg/Piece)	7	6	6.2 10	6 9.5
Working Temp(°C)	-10~40	-10~40	-10~40	-10~40

Project Reference

KIABI



(Madrid, Spain)

(Singapore)



Project Video

 [YouTube.com/NEXNOVO](https://www.youtube.com/NEXNOVO)

 [Facebook.com/NEXNOVO](https://www.facebook.com/NEXNOVO)

 [Twitter.com/NEXNOVO](https://www.twitter.com/NEXNOVO)

©SHENZHEN NEXNOVO TECHNOLOGY CO,LTD | www.nexnovo.com

Address: Floor 5, Factory Building 2, No. 8, Qinglan Road 1, Pingshan Industry Zone, Pingshan District, Shenzhen, China 518118

Sale Tel: (+86)135 5498 8302 (+86)136 9220 1880

E-mail: sale@nexnovo.com